



1. Instalacja programu Postman. (ze strony postman.com)
2. Założenie nowego workspace'a.

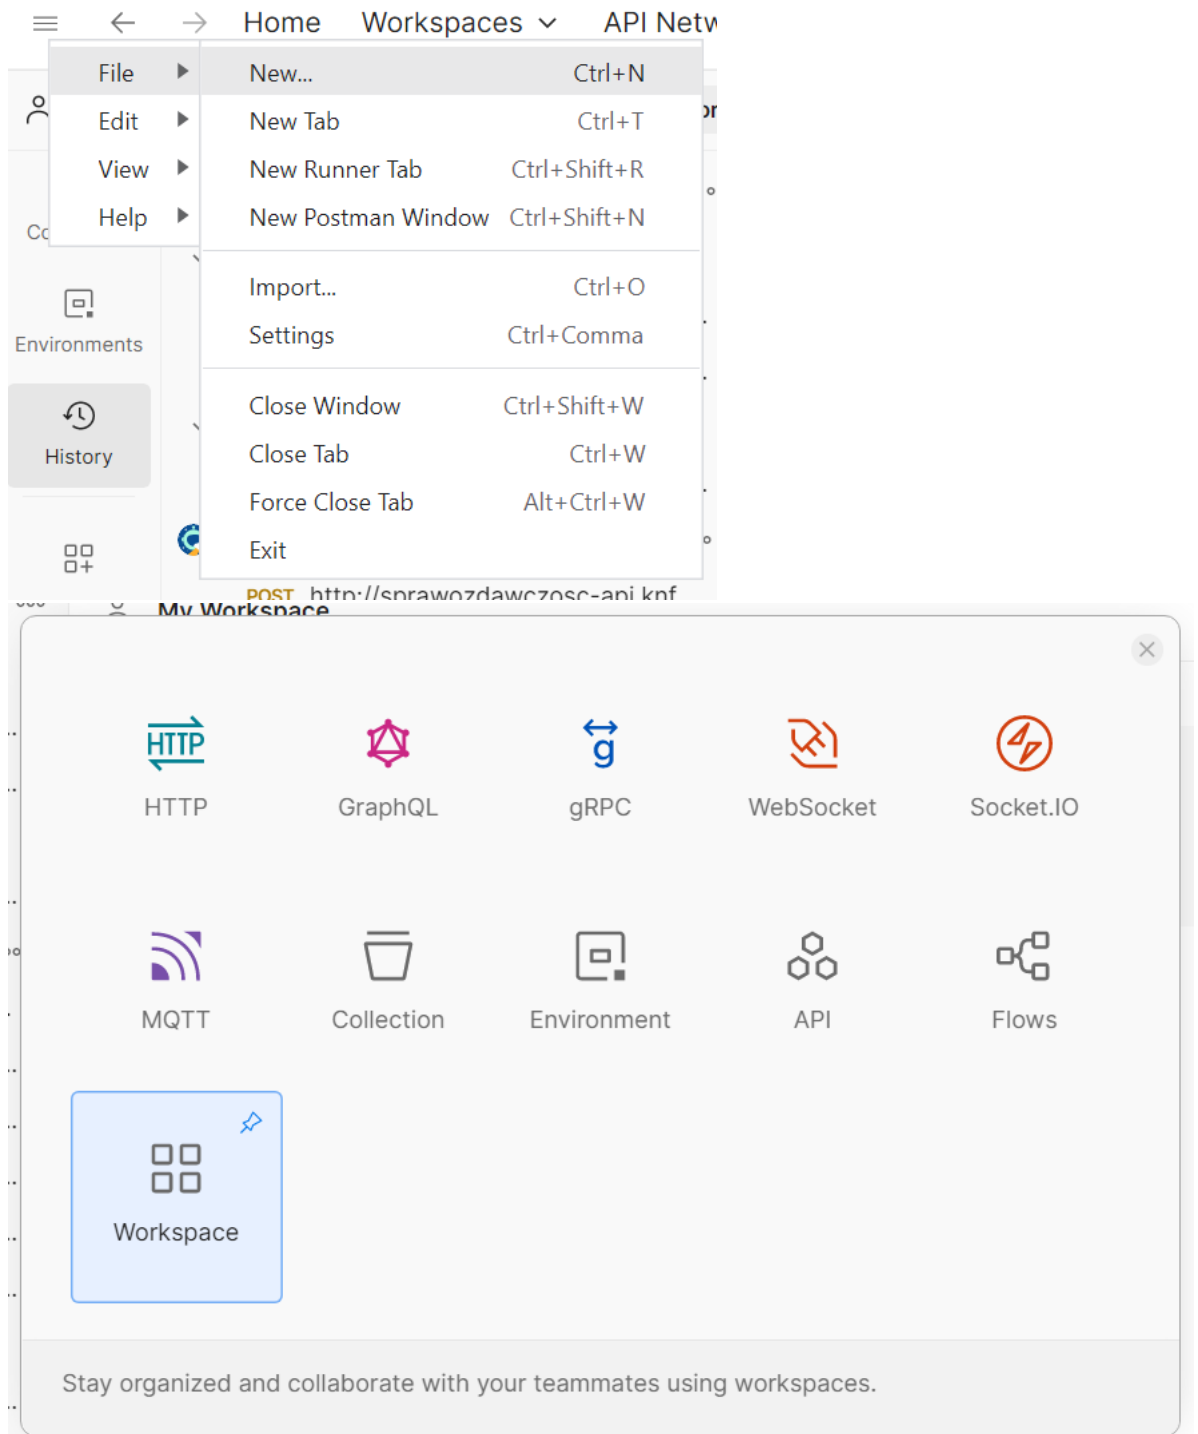


# Create your workspace


Get the most out of your workspace with a template.


 **Blank workspace** ✓


## Explore our templates


 API demos

 API development

 API testing

 API security

 Incident response

 Cloud infrastructure management

Step 1 of 2

Cancel

Next

# Create your workspace

Name

Walidator UKNF

Summary

walidacja raportów xml dla UKNF

Who can access your workspace?

- Personal  
Only you can access
- Private  
Only invited team members can access
- Team  
All team members can access
- Partner  
Only invited partners and team members can access
- Public  
Everyone can view

Step 2 of 2

Back

Create

3. Kolejnym krokiem jest odpowiednie stworzenie i uzupełnienie zapytania.

The screenshot shows the workspace overview page for 'Walidator UKNF'. The top navigation bar includes 'New' and 'Import' buttons, and a red circle highlights a '+' icon. The main content area is divided into three sections: 'Workspace description', 'Pinned collections', and 'About'. The 'About' section shows the workspace name 'walidacja raportów xml dla UKNF' and the contributor 'You'. The 'Pinned collections' section is currently empty. The 'Workspace description' section has a text area for adding information. The 'About' section also includes a link to 'View workspace activity'.

4. W polu *Enter URL* wpisujemy „<https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml>” i ustawiamy metodę na *POST*.

The screenshot shows the Postman interface for a POST request to `https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml`. The request method is set to POST. A dropdown menu is open, showing the following options: GET, POST (highlighted), PUT, PATCH, DELETE, HEAD, and OPTIONS. Below the dropdown, there is a text input field with the placeholder "Type a new method". The interface also shows tabs for Headers (9), Body, Pre-request Script, Tests, and Settings. A table with columns "Value" and "Description" is visible. At the bottom, there is a cartoon astronaut holding a rocket and the text "Click Send to get a response".

5. W zakładce *Headers* dodajemy pole z kluczem do API.

The screenshot shows the Postman interface with the Headers tab selected. The request method is POST to `https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml`. The Headers tab shows a list of headers with checkboxes for each. A red box highlights an empty header row. The list of headers is as follows:

Key	Value	Description
<input checked="" type="checkbox"/> Cookie	cookiesession1=678A3E7F003470F855...	
<input checked="" type="checkbox"/> Cache-Control	no-cache	
<input checked="" type="checkbox"/> Postman-Token	<calculated when request is sent>	
<input checked="" type="checkbox"/> Content-Length	0	
<input checked="" type="checkbox"/> Host	<calculated when request is sent>	
<input checked="" type="checkbox"/> User-Agent	PostmanRuntime/7.36.0	
<input checked="" type="checkbox"/> Accept	*/*	
<input checked="" type="checkbox"/> Accept-Encoding	gzip, deflate, br	
<input checked="" type="checkbox"/> Connection	keep-alive	
<input type="checkbox"/>		

Below the headers table, there is a section for "Response" which is currently empty.

POST https://sprawozdawc: + No Environment

https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml Save

POST https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml Send

Params Authorization Headers (10) Body Pre-request Script Tests Settings Cookies

	Key	Value	Description	...	Bulk Edit	Presets
<input checked="" type="checkbox"/>	Cookie	cookiesession1=678A3E7F003470F855...				
<input checked="" type="checkbox"/>	Cache-Control	no-cache				
<input checked="" type="checkbox"/>	Postman-Token	<calculated when request is sent>				
<input checked="" type="checkbox"/>	Content-Length	0				
<input checked="" type="checkbox"/>	Host	<calculated when request is sent>				
<input checked="" type="checkbox"/>	User-Agent	PostmanRuntime/7.36.0				
<input checked="" type="checkbox"/>	Accept	*/*				
<input checked="" type="checkbox"/>	Accept-Encoding	gzip, deflate, br				
<input checked="" type="checkbox"/>	Connection	keep-alive				
<input checked="" type="checkbox"/>	x-api-key					
	Key	Value	Description			

Jako wartość należy wprowadzić aktywny klucz dostępu do API, który otrzymaliście Państwo razem z dokumentacją walidatora.

POST https://sprawozdawc: + No Environment

https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml Save

POST https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml Send

Params Authorization Headers (10) Body Pre-request Script Tests Settings Cookies

	Key	Value	Description	...	Bulk Edit	Presets
<input checked="" type="checkbox"/>	Cookie	cookiesession1=678A3E7F003470F855...				
<input checked="" type="checkbox"/>	Cache-Control	no-cache				
<input checked="" type="checkbox"/>	Postman-Token	<calculated when request is sent>				Go to settings
<input checked="" type="checkbox"/>	Content-Length	0				
<input checked="" type="checkbox"/>	Host	<calculated when request is sent>				
<input checked="" type="checkbox"/>	User-Agent	PostmanRuntime/7.36.0				
<input checked="" type="checkbox"/>	Accept	*/*				
<input checked="" type="checkbox"/>	Accept-Encoding	gzip, deflate, br				
<input checked="" type="checkbox"/>	Connection	keep-alive				
<input checked="" type="checkbox"/>	x-api-key	tutaj należy wpisać klucz				
	Key	Value	Description			

Response

6. W zakładce *Body* wybieramy opcję *form-data* i jako klucz ustawiamy „xmlFile” oraz wybieramy opcję *File*.

POST https://sprawozdawc: + No Environment

https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml Save


POST https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml Send

Params Authorization Headers (10) **Body** Pre-request Script Tests Settings Cookies

● none ● **form-data** ● x-www-form-urlencoded ● raw ● binary ● GraphQL

Key	Value	Description	...	Bulk Edit
Key	Text	Value		Description

Response



POST https://sprawozdawc: + No Environment

https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml ? Save


POST https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml ? Send

Params Authorization Headers (11) **Body** Pre-request Script Tests Settings Cookies

● none ● **form-data** ● x-www-form-urlencoded ● raw ● binary ● GraphQL

Key	Value	Description	...	Bulk Edit
<input checked="" type="checkbox"/> xmlFile	File	Select files		
Key	Text	Value		Description

Response



W polu *Select files* wybieramy dokładnie jeden plik do walidacji, po czym wysyłamy zapytanie guzikiem *Send*.

POST https://sprawozdawc: + No Environment

https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml ? Save


POST https://sprawozdawczosc-api.knf.gov.pl/walidator/v1/validate-xml ? Send

Params Authorization Headers (11) **Body** Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL

	Key		Value	Description	...	Bulk Edit
<input checked="" type="checkbox"/>	xmlFile	File	EMISJECL [redacted]			
	Key	Text	Value	Description		

Response



Odpowiedź walidatora powinna wyświetlić się w polu Response.